2.5mm间距孔型连接器（防错）2.5mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	5
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-0.5	28-20
柔性导线截面积 Flexible	[mm²][AWG]	0.2-0.5	28-20
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
4251XX	2-12
4251XX/050	2-12

附件Accessory	

4251XX

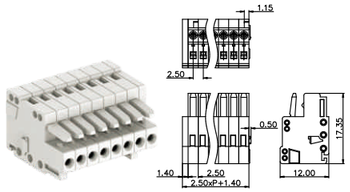

4251XX/050

带卡接钩with locking device

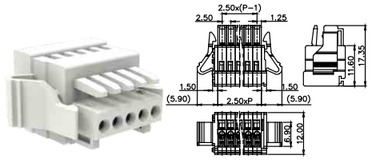

2.5mm间距焊针插座（防错） 2.5mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	5
额定电压 Rated voltage	[V]	160	150
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4252XX	2-12
4253XX	2-12

附件Accessory	

4252XX

直针型vertical solder pin

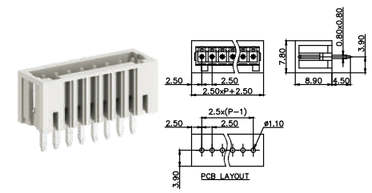

4253XX

弯针型right angle solder pin

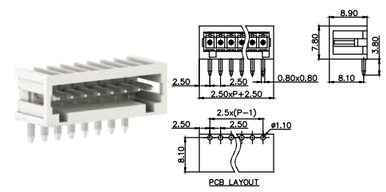

2.5mm间距针型连接器（防错） 2.5mm Male connector with spring-cage clamp (protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	4	13.5
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-0.5	24-16
柔性导线截面积Flexible	[mm²][AWG]	0.2-0.5	24-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	5-6

订货号/通道数 Order /Poles No.	
4254XX	2-12

附件Accessory	

4254XX

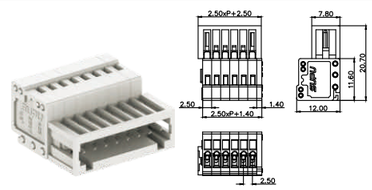

3.5mm间距孔型连接器（防错）3.5mm Female connectors(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	0.2-1.5	28-16
柔性导线截面积 Flexible	[mm²][AWG]	0.2-1.5	28-16
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	7-8

订货号/通道数 Order /Poles No.	
4351XX	2-24
4351XX/050	2-24
4351XX/010	2-24

附件Accessory	
43597X	
43555X	
435013	

4351XX



4351XX/050

带卡接钩with locking device

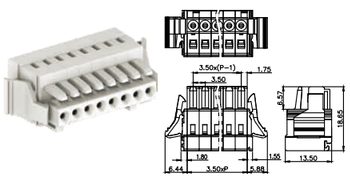

4351XX/010

带固定器with fixing flange



3.5mm间距焊针插座（防错） 3.5mm Solder pin(protected against mismating)

产品信息Product Information			
IEC/UL数据 IEC/UL Data		IEC	UL
额定电流 Rated current	[A]	10	10
额定电压 Rated voltage	[V]	160	300
硬导线截面积 Solid	[mm²][AWG]	-	-
柔性导线截面积 Flexible	[mm²][AWG]	-	-
额定冲击电压 Rated impulse voltage	[KV]	2.5	-

产品信息Product Information		
锁线螺钉 Locking crew		-
扭矩 Torque	[N·m]	-
固定螺钉 Fixed screw		-
扭矩 Torque	[N·m]	-
剥线长度 Strip length	[mm]	-

订货号/通道数 Order /Poles No.	
4352XX	2-24
4352XX-01D	2-24
4353XX	2-24
4352XX-01D	2-24

附件Accessory	
435015	

4352XX

直针型vertical solder pin



4352XX-01D

直针型vertical solder pin

4353XX

弯针型right angle solder pin

4358XX
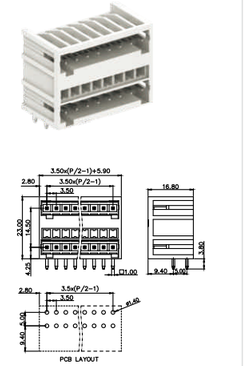
双层弯针型Double layer right angle solder pin